

A lion stands prominently in the center of the frame, positioned on a large, dark-colored tiled surface that recedes into the distance. The background features a dense urban skyline with various high-rise buildings under a clear sky. The lighting is bright, casting a shadow of the lion onto the tiles.

 **GRÈSBOND**  
by *Kajaria*

PREMIUM TILE ADHESIVES AND GROUTS

**LX-7**

**FOR LARGE FORMAT TILES, MARBLE & STONES**

TYPE-4 TS1 WHITE/GREY, HIGH PERFORMANCE TILE ADHESIVE





## UNMATCHED STRENGTH

Type : 4TS1

**PERFECT BOND FOR LARGE TILES, MARBLES & STONES**

### PRODUCT DESCRIPTION:

A highly deformable, polymer-modified tile adhesive for large-format tiles and stones. Suitable for both wall and floor installations.

GRESBOND LX-7 Super Flex is a multipurpose, highly polymer-modified, and highly deformable adhesive designed for the installation of large-format tiles and stones on various substrates. Its superior flexibility accommodates movements in the substrate, ensuring exceptional performance with sag and slump resistance. Suitable for both wall and floor installations with bed thickness up to 15 mm.

Note : Not recommended for direct use onto gypsum plaster (wall), paint, or metal.

CERTIFICATIONS	PACKAGING	COLOUR
IS 15477:2019 - Type: 4 T S1	20 kg	Grey & White

**LX-7**

TYPE-4 TS1 WHITE/GREY

HIGH PERFORMANCE TILE ADHESIVE

### SUBSTRATES

Precast Concrete	Brick Masonry
Shear Walls	Kajaria Gres, Vitrified and Natural Stone
Concrete	Gypsum Wallboard (for dry areas)
Cement Plaster	Calcium Silicate Boards (for dry areas)
Cement Mortar Beds	Fiber Cement Boards

### FEATURES / BENEFITS:

High Strength	Non-Sag/Non-Slump
Superior Flexibility	Crack Resistance
Extended Open Time	Impact Resistance

Meets IS 15477 Type 4/TS1 Adhesive Standards

### APPLICATIONS


Interior and Exterior Installations

Wet Areas (Swimming Pools, Saunas, Washrooms)

Tile-on-Tile Applications

### COVERAGE :

- Approx. 55-60 sq. ft. per 20 kg bag (using a 6mm x 6mm notched trowel for a 3mm bed) (Can be used up to a maximum bed thickness of 15 mm). Coverage will vary depending on trowel notch size, type and size of tile, and substrate smoothness and evenness.
- 1.2 kg/m<sup>2</sup> per mm of thickness (coverage may vary)

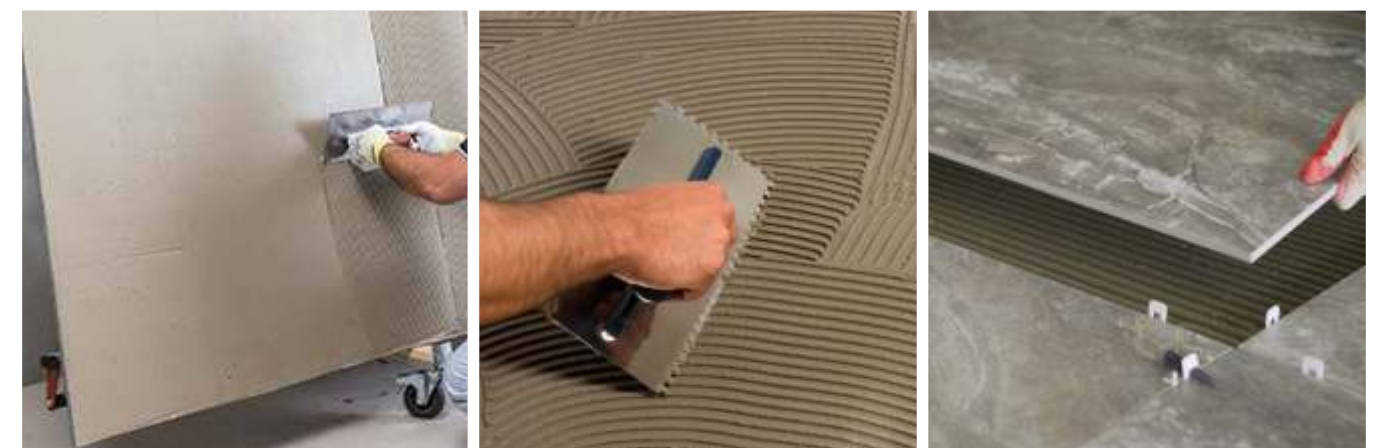



YOU CAN REACH US AT :

## SOUTH

### BANGALORE :

Phone : 080-41440019/20/30

E-mail : bangalore@kajariaceramics.com

### COCHIN :

Phone : 0484-2912000

E-mail : coc@kajariaceramics.com

### CHENNAI :

Phone : 044-42691094/ 28264990

E-mail : chn@kajariaceramics.com

### COIMBATORE :

Phones : 0422-4350801/4350803

E-mail : coimbatore@kajariaceramics.com

### HYDERABAD :

Phone : 040 - 66106058, Mob.: 9000005392

E-mail : hyderabad@kajariaceramics.com

## WEST

### AHMEDABAD

Phone: 9724340881

E-mail : ahm@kajariaceramics.com

### MORBI :

Phone : 7046689961

E-mail : morbi@kajariaceramics.com

### PUNE :

Phone: 020-6647 1600

pune@kajariaceramics.com

### MUMBAI :

Phone : 022-61433100

E-mail : mum@kajariaceramics.com

[www.gresbondbykajaria.com](http://www.gresbondbykajaria.com)